

Universal Motors – Technical Specifications



UM40A-4LSQD

Application : Front Loading Washing Machine

Universal motor for Fully Automatic washing machine with duty cycle up to 60% with 6.5 Kg Load with a spin speed up to 1200 rpm with tapped field is possible. This motor is designed with Higher Diameter Rotor for Higher Efficiency

Rated Voltage : 220 / 240 V AC 50/60 Hz and DC

Output Power : 300 Watts

Speed : 14500 RPM

Efficiency : 75 %

Stack Length : 40mm

Belt drive : Poly-V-Belt profile J

Feedback System : 16 Pole Tacho Generator

Pulley Ratio : 10 -14 (According to Customer requirement)



Insulation : Class F/H for Motor Winding & Class B for Tacho

Field winding : Aluminium Winding


Over Load Prot. : Thermal Over Load Protector

Direction : CW / CCW

Motor Weight : 4.9 Kg

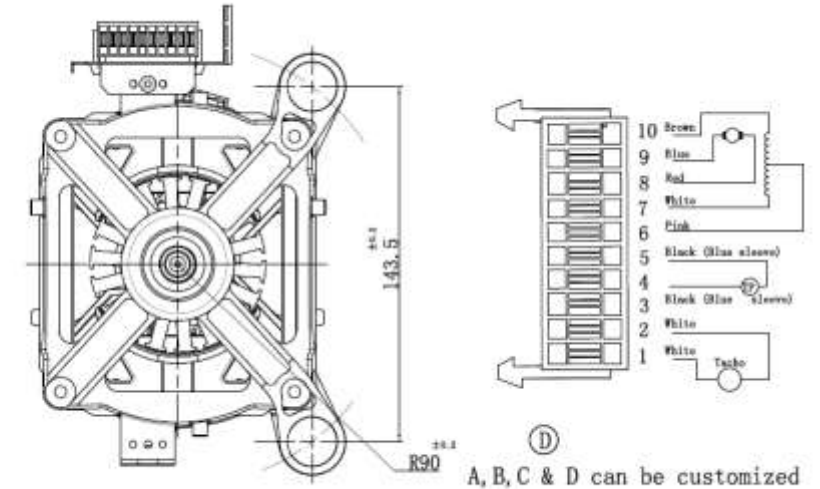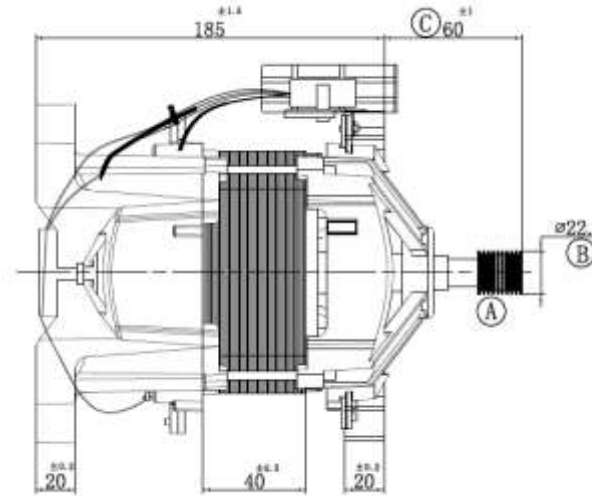

A, B, C & D can be customized

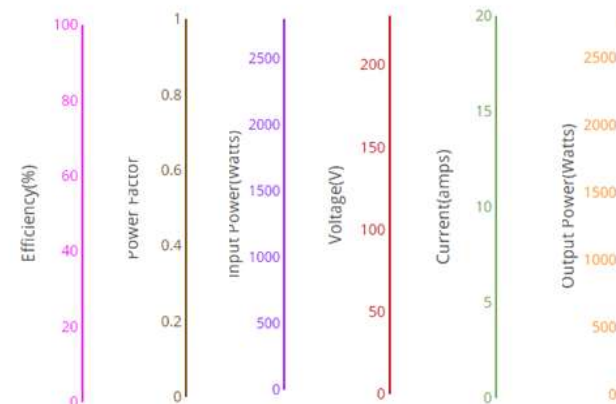

Universal 40mmAI

